


MultiSwitch CE 9/8, 12, 16, 24, 32 HD

The modern system for distribution of SAT (two satellite position - 8 polarities) and DVB-T signal for 8, 12, 16, 24 or 32 participants.

KLASSE
A
CLASS

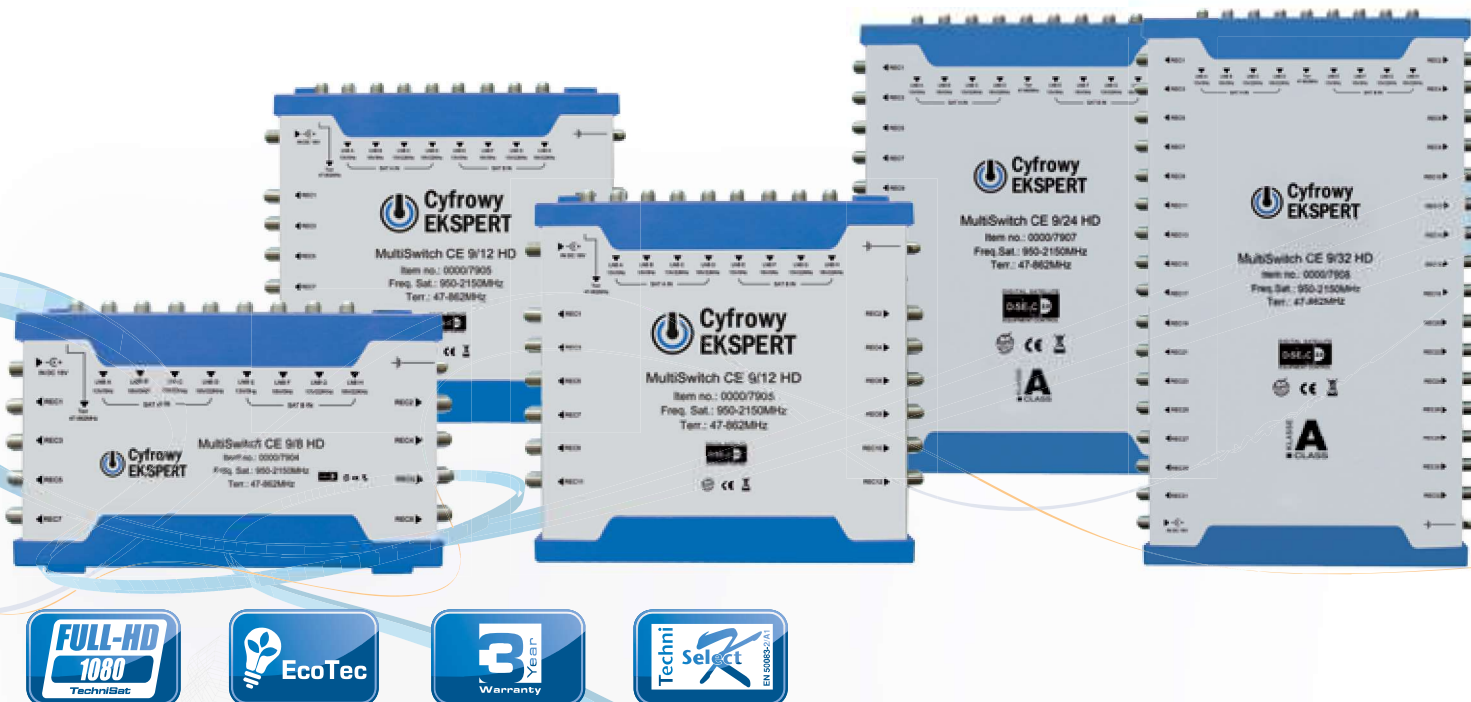


Technical data

- Frequency range: Terrestrial signal: 47~862 MHz; SAT signal: 950 ~2150 MHz
- Inputs: 8 SAT + 1 terrestrial (F connector)
- Outputs:
 - 9/8:** 8 outputs for distribution signal up to 8 participants (F connector)
 - 9/12:** 12 outputs for distribution signal up to 12 participants (F connector)
 - 9/16:** 16 outputs for distribution signal up to 16 participants (F connector)
 - 9/24:** 24 outputs for distribution signal up to 24 participants (F connector)
 - 9/32:** 32 outputs for distribution signal up to 32 participants (F connector)
- Control: 13V and 18V
- Separation: 30 dB
- LNB power: Max. 1600 mA, 18 V
- Maximum input level: Terr: 85 dBμV; SAT: 100 dBμV
- Power consumption: 29 W in normal operation work with LNB
- Dimension (WxDxH):
 - 9/8:** 220x138x44 mm, **9/12:** 220x210x44 mm ; **9/16:** 220x210x44 mm
 - 9/24:** 223x215x42 mm; **9/32:** 222x358x42 mm
- 3 years warranty (2 years full warranty + an additional year after product registration)

Installation example:

MultiSwitch CE 9/8 HD is a brand-new product in the IF Distribution assortment of Cyfrowy Ekspert. It has eight Satellite IF-Inputs for analogue and/or digital polarities (from two satellites) and one terrestrial input for the complete frequency range of 47 to 862 MHz. New MultiSwitch CE 9/8 HD allow to distribute signal up to 8 users. With very good quality of housing and brackets this device is easy on installation inside building.

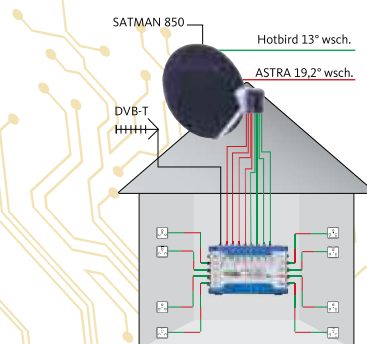

Item no.	Name	EAN
0000/7904	MultiSwitch CE 9/8 HD	4019588079045
0000/7905	MultiSwitch CE 9/12 HD	4019588079052
0000/7906	MultiSwitch CE 9/16 HD	4019588079069
0000/7907	Multiswitch CE 9/24 HD [NEW]	4019588977006
0000/7908	Multiswitch CE 9/32 HD [NEW]	4019588897007