

APS 15i

Switching power supplier

Description of electrical safety symbols



Product complies with CE marking requirements.



Installation is only permitted in dry rooms and on a non-flammable surface. Ensure that there is adequate air circulation.



The product at the end of its life must be collected separately from other waste in order to allow for proper treatment and recycling.



Risk of fire or electrocution.



Symbol meaning that the mains power supply complies with the safety requirements for class II devices.

AMF ELECTRONICS

Installation and safety instructions

- Do not use this product for uses that are different from those for which it has been designed.
- The product must not come into contact with water or be wetted by liquids.
- Do not touch the appliance with wet or humid parts of the body.
- When installing in a cabinet or recessed compartment, provide adequate ventilation.
- Prepare the connection to the power supply in accordance with the regulations in force in the country of installation and in such a way that it can be easily disconnected.
- In the event of a fault, do not attempt to repair the product.
- To avoid the risk of fire do not use the product in the presence of inflammable substances and vapours, such as alcohol, insecticides, petrol, ect..
- Do not place products near heat sources or in places with moisture.
- Connection to the load must be made with the power supply switched off (the mains plug disconnected from the mains socket).
- Do not use the product at environmental temperatures more than 50°C.

APS 15i

Switching power supplier

Description of electrical safety symbols



Product complies with CE marking requirements.



Installation is only permitted in dry rooms and on a non-flammable surface. Ensure that there is adequate air circulation.



The product at the end of its life must be collected separately from other waste in order to allow for proper treatment and recycling.



Risk of fire or electrocution.




Symbol meaning that the mains power supply complies with the safety requirements for class II devices.

AMF ELECTRONICS

Installation and safety instructions

- Do not use this product for uses that are different from those for which it has been designed.
- The product must not come into contact with water or be wetted by liquids.
- Do not touch the appliance with wet or humid parts of the body.
- When installing in a cabinet or recessed compartment, provide adequate ventilation.
- Prepare the connection to the power supply in accordance with the regulations in force in the country of installation and in such a way that it can be easily disconnected.
- In the event of a fault, do not attempt to repair the product.
- To avoid the risk of fire do not use the product in the presence of inflammable substances and vapours, such as alcohol, insecticides, petrol, ect..
- Do not place products near heat sources or in places with moisture.
- Connection to the load must be made with the power supply switched off (the mains plug disconnected from the mains socket).
- Do not use the product at environmental temperatures more than 50°C.

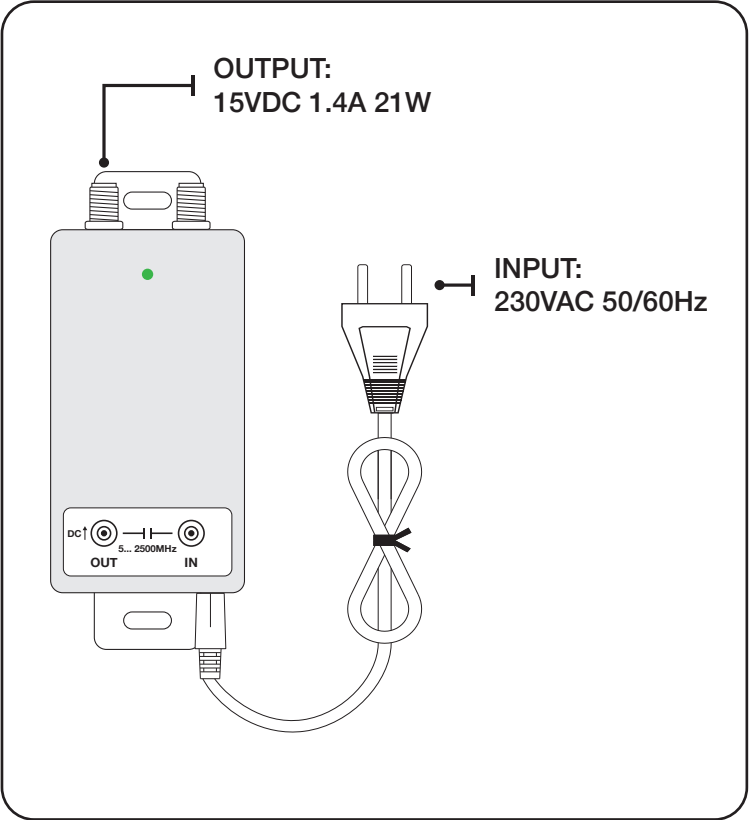


MODEL		APS 15i
INPUT VOLTAGE		230±20%VAC 50/60Hz
OUTPUT VOLTAGE	VDC	15 ± 2%
MAX. CURRENT OUTPUT	A	1.4
MAX. POWER OUTPUT	W	21
NO-LOAD POWER CONSUMPTION		118mW @ 230V
EFFICIENCY		89% @ 230V
RIPPLE RMS		≤ 8mV @ 21W
RF BANDPASS	MHz	5... 2500
RF PASS THROUGH LOSS	dB	≤ 1
RETURN LOSS	dB	> 12
AC POWER CORD		1 ML with 2.5A Euro plug
DC OUTPUT CORD		1 ML conn. F - plug 5.5mm x 2.1mm
OPERATING TEMPERATURE	°C	10... 50
DIMENSIONS	mm	140X62X40

Pack contents

- 01 Power supplier APS 15i
- 01 AC power cord
- 01 DC output cord

AMF ELECTRONICS 33-35 Archimidus str., 14569 Anixi Attikis Greece
Tel. +30 210 6229298 Fax. +30 210 8130248 email: info@amfelectronics.gr

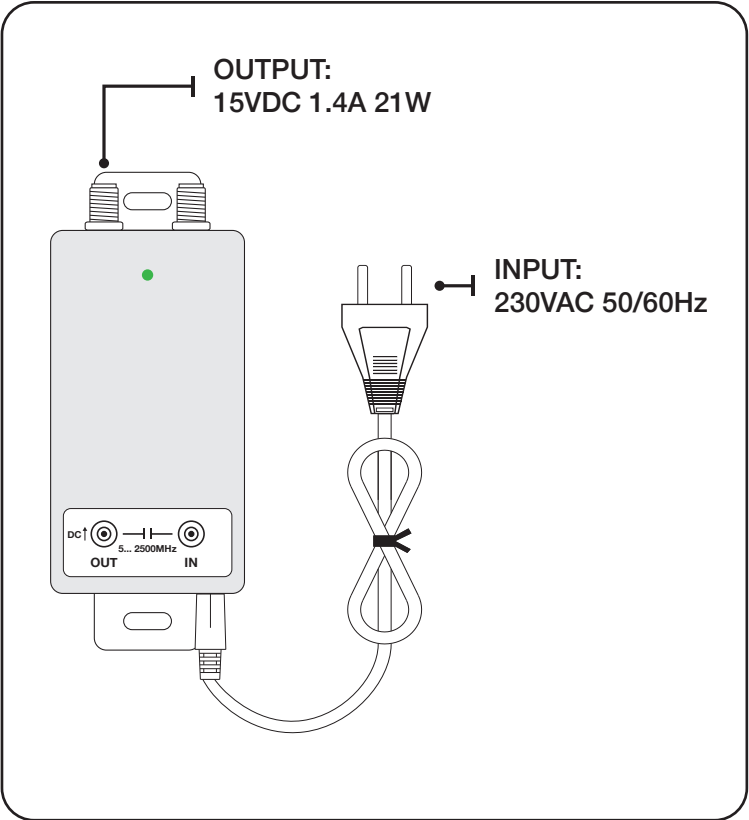

MODEL		APS 15i
INPUT VOLTAGE		230±20%VAC 50/60Hz
OUTPUT VOLTAGE	VDC	15 ± 2%
MAX. CURRENT OUTPUT	A	1.4
MAX. POWER OUTPUT	W	21
NO-LOAD POWER CONSUMPTION		118mW @ 230V
EFFICIENCY		89% @ 230V
RIPPLE RMS		≤ 8mV @ 21W
RF BANDPASS	MHz	5... 2500
RF PASS THROUGH LOSS	dB	≤ 1
RETURN LOSS	dB	> 12
AC POWER CORD		1 ML with 2.5A Euro plug
DC OUTPUT CORD		1 ML conn. F - plug 5.5mm x 2.1mm
OPERATING TEMPERATURE	°C	10... 50
DIMENSIONS	mm	140X62X40

Pack contents

- 01 Power supplier APS 15i
- 01 AC power cord
- 01 DC output cord

AMF ELECTRONICS 33-35 Archimidus str., 14569 Anixi Attikis Greece
Tel. +30 210 6229298 Fax. +30 210 8130248 email: info@amfelectronics.gr